

dcgv

by Jnhyg Gtfc

Submission date: 08-May-2023 07:16AM (UTC+0700)






Submission ID: 2086880385

File name: Conference-ICAST-ES-JatrophaOil_2023SCITEPRESS_1.pdf (449.4K)

Word count: 2855

Character count: 14708

2 Development and Characterization of Jatropha Oil as Innovative Bio-sourced Phase Change Material for Thermal Energy Storage

Made Rasta¹, Nyoman Suamir¹, Wayan Adi Subagia¹, Adi Winarta¹,
Ketut Bangse¹ and Gusti Ketut Puja²

¹Mechanical Engineering Department, Bali State Polytechnic, Bali-80364, Indonesia

²Mechanical Engineering Department, Sanata Dharma University, Yogyakarta-55002, Indonesia

Keywords: Jatropha Oil, Bio-phase Change Material, Thermal Energy Storage.

Abstract: Thermal energy storage (TES) using phase change materials (PCM) is very promising to meet future energy needs because of its high storage capacity and low cost. This study aims to develop Jatropha oil as a new candidate for solid-liquid latent heat energy storage for cold storage applications. The characteristics of Jatropha oil as a candidate for PCM were tested experimentally using T-history methods. The test results show that Jatropha oil as a PCM candidate does not undergo super-cooling or super-cooling is very small compared to tap water and mineral water of 10 K and 15 K. The phase transition temperature of Jatropha oil ranges from -14 °C to -16 °C, lower than with tap freezing point and mineral water at 0 °C. Thus, the candidate PCM has good thermal properties that can meet the thermal energy storage requirements for cold storage applications.

1 INTRODUCTION

Along with the increase in the economy and population development, the need for energy is increasing. Energy is a vital need in development. Energy is still sourced from fossil fuels which can cause climate change and environmental degradation. Therefore, it is important to save energy and use new and renewable energy sources that are environmentally friendly for sustainable development. Energy storage (ES) systems play an important role in supporting energy security. Energy can be stored in electrical, mechanical and thermal energy.






One of the important ES systems for storing and retrieving energy for energy conversion systems is thermal energy storage (TES). The use of a TES system based on latent heat technology can save energy use from fossil fuels and conserve energy. TES helps rational use of thermal energy and has the

advantage that it allows the transfer of peak loads beyond peak loads, is significant in energy savings and mitigation of CO₂ that causes pollution to the environment.

Latent heat thermal energy storage (LHTES) is an attractive technique because it can provide a higher energy storage density than conventional TES systems. Has the ability to store the heat of fusion at a constant (relatively constant) temperature corresponding to the phase transition temperature of the phase change material (PCM).

One of the typical applications of PCM is for the storage of solar thermal energy which is considered the most abundant renewable energy. Utilization of PCM for TES can overcome the intermittency of solar energy, thus providing a better solution to rationalize the utilization of solar thermal energy, compared to the sensible heat TES system.

ES is a promising power management method to obtain sustainable energy utilization. ES using

¹⁵
 <https://orcid.org/0000-0002-9610-3738>
 <https://orcid.org/0000-0003-0594-7511>
 <https://orcid.org/0000-0001-9261-3549>
 <https://orcid.org/0000-0003-0220-056X>
 <https://orcid.org/0000-0002-6025-3865>

716

Rasta, M., Suamir, N., Subagia, W., Winarta, A., Bangse, K. and Puja, G.

Development and Characterization of Jatropha Oil as Innovative Bio-sourced Phase Change Material for Thermal Energy Storage.

DOI: 10.5220/00109520000003260

In Proceedings of the 4th International Conference on Applied Science and Technology on Engineering Science (ICAST-ES 2021), pages 716-720

ISBN: 978-989-758-615-6; ISSN: 2975-8246

Copyright © 2023 by SCITEPRESS – Science and Technology Publications, Lda. Under CC license (CC BY-NC-ND 4.0)

LHTES is currently receiving a lot of attention to reduce grid energy requirements.

TES schemes using PCM are categorized into organic, inorganic and organic-inorganic mixtures. Organic PCMs, such as paraffin and fatty acids, have little super-cooling properties (no super-cooling occurs) because they have self-nucleation but lower thermal conductivity and higher cost. Inorganic PCMs, such as hydrated salts, are readily available and less expensive, but occurs phase separation, and corrosive (Rasta and Suamir, 2019). Therefore, it is important to select the optimal PCM in a given application to meet operating and cost requirements.

The main problem of TES technology is developing effective PCM for energy storage (Wang & Lu, 2013). The main criteria in determining the selection of PCM material types for TES applications are to have a phase change temperature in the practical application range, have high latent heat and good thermal conductivity, as they involve the energy storage and thermal stability characteristics of the PCM.

By far the most famous PCM is water because it has good thermal properties, but has the disadvantage of high super-cooling (Rasta and Suamir, 2018). In this study, Jatropa oil was developed as a PCM material. Oil is a complex fatty acid/fatty acid ester. Oils or fatty acids are a new class of organic PCM materials and the thermal data available in the literature are still limited (Aydin & Okutan, 2011). Oils or fatty acids are derivatives of materials easily found in nature and are labelled as bio-based ingredients (Cellata, et al., 2015; Sharma, et al., 2015). Another advantage is that vegetable oils are available continuously (Sharma, et al., 2014; Fauzi, et al., 2015; Suamir, et al., 2019).


Given the complexities of LHTES problems, developing an effective PCM for energy storage in a suitable form is still a big challenge and many methods have been sought (Yingbo, et al., 2014). The aim of this paper is to develop new bio-materials for low temperature thermal energy storage below 0 °C for refrigeration system applications.

2 MATERIAL AND METHOD

The material used as Latent Heat Thermal Energy Storage in this research is Jatropa oil. Jatropa oil was chosen because of its sufficient availability in the field and cultivated by farmers to increase their income. The Jatropa oil tested here has undergone a hydrolysis process. Jatropa oil contains various fatty

acids, both saturated and unsaturated fatty acids (PUFA).

The thermal properties of Jatropa oil will be compared with the thermal properties of tap water and mineral water. Water is an excellent PCM material, but has the disadvantage of high super-cooling and a freezing point of 0 °C. The results of the Jatropa oil test will be compared with water, to explain the characteristics of Jatropa oil.

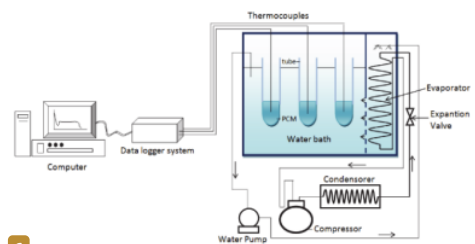

6
Figure 1: Schematic diagram of the experimental test equipment T-history method (Rasta, et al., 2016a).

23
Figure 1 shows that the prospective PCM Jatropa oil in various volumes is put into a glass tube and immersed in a water bath as a cooling medium. The cooling medium is a mixture of 40% (volume) polypropylene glycol with tap water. The cooling medium is circulated by pump through the evaporator of the system. The temperature of the cooling medium can be as low as -25 °C. However, for testing, the temperature of the cooling medium was maintained stable at -20 °C by using a digital thermostat with an accuracy of ± 0.2 °C.

The data recording system shown in Figure 1 is equipped with a data acquisition module and a computer for recording or display systems. The data acquisition module utilizes the Data scan 7000 series from MSL (Measuring Systems Ltd) which includes the Data scan 7320 measurement processor and the 7020 expansion module. Type T thermocouples are used to measure the temperature of the PCM candidate and cooling medium. The thermocouple has a temperature measurement range of -250 °C to 350 °C with an error of ± 0.5 °C. The thermocouple was calibrated using a water bath calibration and the uncertainty of the thermometer precision was ± 0.04 °C. In the test temperature range is -25 °C to 50 °C (Rasta, et al., 2016b).

3 RESULT AND DISCUSSION

Super-cooling degree is an important parameter in LHTES technology using PCM. Figures 2 and 3 show

that tap water and mineral water have high super-cooling, namely 10 K and 15 K. Super-cooling is a condition that indicates the presence of tap water and mineral water still in liquid form below the freezing point of 0 °C. A LHTES technology with high super-cooling, will result in a much lower evaporation temperature required when applied in the cooling system. Thus will reduce the performance of the system. In addition, before tap water and mineral water freeze, the energy stored is only in the form of sensible heat, causing a very small energy storage capacity. In order for tap water and minerals to store energy in the form of latent heat, more energy is needed to change the state from liquid to solid. The greater energy requirements in PCM technology are in direct conflict with thermal energy storage technology. So high super-cooling is a disadvantage in LHTES technology

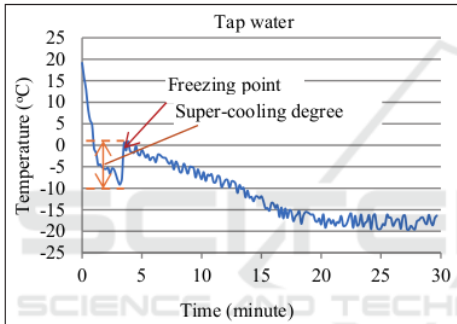


Figure 2: Cooling process and super-cooling tap water.

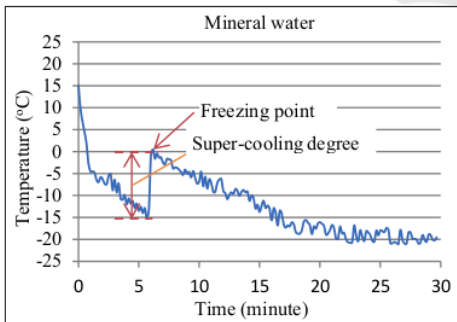


Figure 3: Cooling process and super-cooling mineral water.

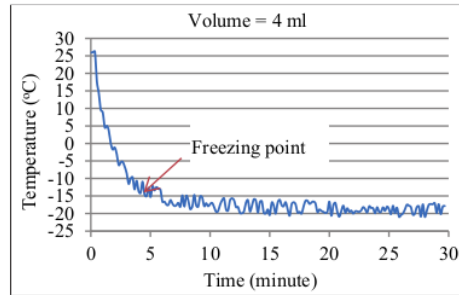


Figure 4: Cooling process and Jatropa oil freezing point for sample 4 ml.

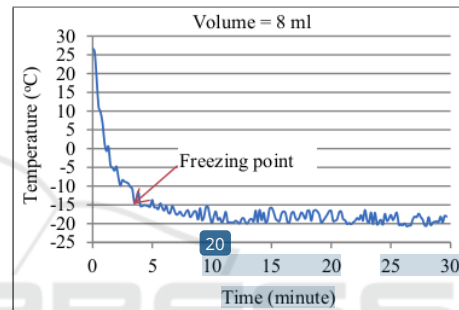


Figure 5: Cooling process and Jatropa oil freezing point for sample 8 ml.

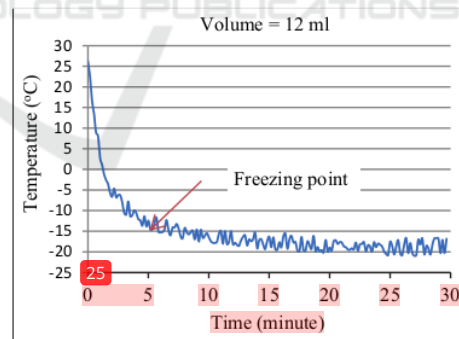


Figure 6: Cooling process and Jatropa oil freezing point for sample 12 ml.

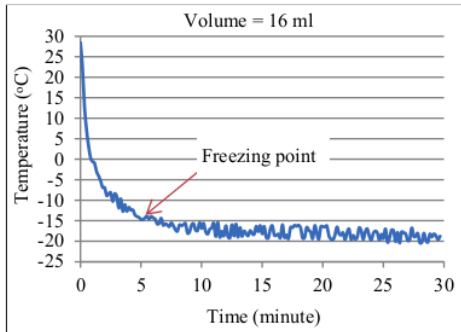


Figure 7: Cooling process and Jatropa oil freezing point for sample 16 ml.

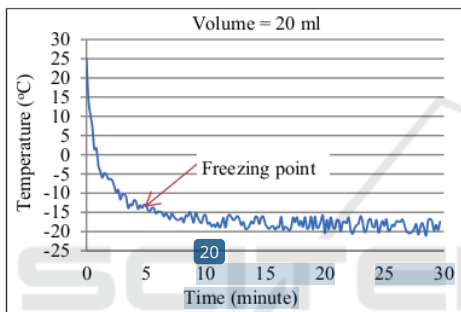


Figure 8: Cooling process and Jatropa oil freezing point for sample 20 ml.

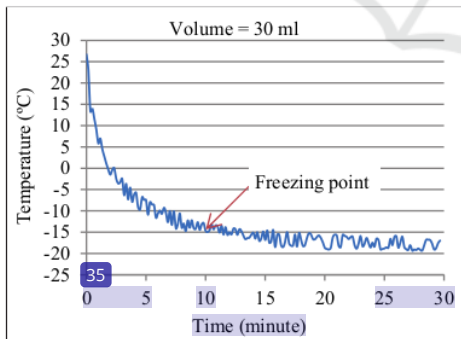


Figure 9: Cooling process and Jatropa oil freezing point for sample 30 ml.

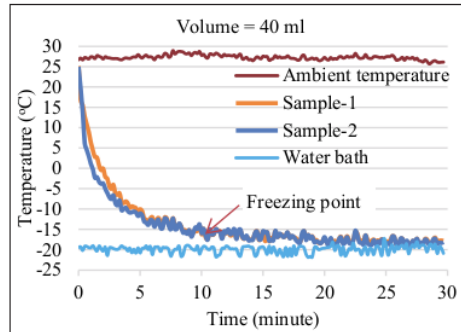


Figure 10: Cooling process and Jatropa oil freezing point for sample 40 ml.

8

Table 1: Thermal energy storages properties of tap water, mineral water and Jatropa oil.

Samples (Volume, ml)	Cooling process	
	Freezing temperature (°C)	Super-cooling degree (K)
Tap water, 20 ml	0	10
Mineral water, 20 ml	0	15
Jatropa oil, 4 ml	14	0
Jatropa oil, 8 ml	14	0
Jatropa oil, 12 ml	15	0
Jatropa oil, 16 ml	15	0
Jatropa oil, 20 ml	15	0
Jatropa oil, 30 ml	16	0
Jatropa oil, 40 ml	16	0

Figures 4-10 shows the cooling process of each volume variation of the Jatropa oil sample developed as PCM. The test results of the T-history method show that in the early stages of cooling process, there is a very rapid decrease in temperature to the initial limit of the transition phase temperature process. At the beginning of the phase transition process until it ends there is no significant or constant temperature change. When a phase transition occurs from the beginning to the end, this is where the storage of latent heat energy occurs. After that the freezing process takes place, the temperature decreases towards the final test temperature setting.

Overall, all samples developed with different volume fractions of Jatropa oil are summarized in Table 1. The freezing point of the PCM candidate developed is lower than that of tap water and mineral water. The freezing point of Jatropa oil in various volumes of 4 ml, 8 ml, 12 ml, 16 ml, 20 ml and 40 ml, ranged from -14 °C to -16 °C. The results showed that increasing the volume of the sample tested did not significantly affect the change in freezing point. Thus, the advantages of Jatropa oil

do not occur super-cooling, have stable properties, are not corrosive and environmentally friendly. These properties make Jatropa a potential PCM material for energy storage for latent heat thermal energy storage applications in low temperature refrigeration systems below 0 °C, compared to water (tap water and mineral water).

4 CONCLUSIONS

An investigation of Jatropa oil as a candidate for the development of a new phase change material (PCM) has been carried out. T-history thermal analysis was applied in the investigation and it was found that Jatropa oil has a phase transition temperature or freezing point ranging from -14 °C to -16 °C. The results of the investigation also found that the candidate PCM under test conditions had a minimum or even none (negligible) super-cooling level. In addition, Jatropa oil has a continuous supply, is non-corrosive and non-toxic. Meanwhile, tap water and mineral water have high super-cooling, which are 10 K and 15 K, respectively, with a freezing point or phase transition temperature of 0 °C. This makes Jatropa oil applicable as a new PCM for cold storage applications below 0 °C.

22

ACKNOWLEDGEMENTS

The authors would like to thank the financial support received from the Ministry of Education, Culture, Research, and Technology of the Republic of Indonesia. This fee is charged to the Bali State Polytechnic DIPA Number: SP DIPA-023.18.2.677608/2021 dated November 23, 2020, which has been submitted to the head of the research as stated in the DIPA Fund Research Implementation Agreement Letter No.: 887/PL8/PG/2021, April 6, 2021.

REFERENCES

- Aydın, A.A., Okutan, H. (2011). High-chain fatty acid esters of myristyl alcohol with even carbon number: Novel organic phase change materials for thermal energy storage-1. *Solar Energy Materials and Solar Cells* 95, 2752-2762.
- Aydın, A.A., Okutan, H. (2011). High-chain fatty acid esters of myristyl alcohol with odd carbon number: Novel organic phase change materials for thermal energy storage-2. *Solar Energy Materials and Solar Cells* 95, 17-2423.
- Cellata, K., Beyhana, B., Güngörb, C., Konukluc, Y., Karahand, O., Dündare, C., Paksoya, H. (2015). Thermal enhancement of concrete by adding bio-based fatty acids as phase change materials. *Energy and Building* 106, 156-163.
- Fabiani, C., Pisello, A.L., Barbaneraa, M., Cabeza, L.F. (2020). Palm oil-based bio-PCM for energy efficient building applications: Multipurpose thermal investigation and life cycle assessment. *Journal of Energy Storage* 28 (2020) 101129
- Fauzi, H., Hendrik, S.C., Metselaar, Mahlia, T.M.I, Silakhori, M., Chyuan-Ong, H. (2015). Thermal characteristic reliability of fatty acid binary mixtures as phase change materials (PCMs) for thermal energy storage applications. *Applied Thermal Engineering* 80, 127-131
- Rasta, I.M., Suamir, I.N. (2018). The role of vegetable oil in water based phase change materials for medium temperature refrigeration. *Journal of Energy Storage* 15, 368-378.
- Rasta, I.M., Suamir, I.N. (2019). Study on Thermal Properties of Bio-PCM Candidates in Comparison with Propylene Glycol and Salt Based PCM for sub-Zero Energy Storage Applications. *IOP Conference Series: Materials Science and Engineering* 494, 012024.
- Rasta, I.M., Wardana, I.N.G., Hamidi, N., Sasongko, M.N. (2016a). The role of heterogeneous nucleation in water based Phase change material for medium temperature Refrigeration. *ARNP journal of engineering and applied sciences* 11(2), 978-985.
- Rasta, I.M., Wardana I.N.G., Hamidi, N., Sasongko M.N. (2016b). The Role of Soya Oil Ester in Water-Based PCM for Low Temperature Cool Energy Storage. *Journal of Thermodynamics*, Volume 2016, Article ID 5384640, 8 pages.
- Suamir, I.N., Rasta, I.M., Sudirman, Tsamos, K.M. (2019). Development of Corn-Oil Ester and Water Mixture Phase Change Materials for Food Refrigeration Applications. *Energy Procedia* 161, 198-206.
- Sharma, A., Shukla, A., Chen, C.R., Wu, T.N. (2014). Development of phase change materials (PCMs) for low temperature energy storage applications. *Sustainable Energy Technology Assessment* 7, 17-21.
- Sharma, R.K., Ganesan, P., Tyagi, V.V., Metselaar, H.S.C., Sandaran, S.C. (2015). Developments in organic solid-liquid phase change materials and their applications in thermal energy storage. *Energy Conversion and Management* 95, 193-228.
- Wang, H.Y., Lu, S.S. (2013). Study on thermal properties of phase change material by an optical DSC system. *Applied Thermal Engineering* 60, 132-136.
- Yingbo, C., Shifeng, Z., Qi, Z., Yusheng, C., Yufeng, Z. (2014). Composite phase change materials prepared by encapsulating paraffin in PVC macrocapsules. *Thermochimica Acta* 578, 10-14.

ORIGINALITY REPORT

48%
SIMILARITY INDEX

42%
INTERNET SOURCES

34%
PUBLICATIONS

15%
STUDENT PAPERS

PRIMARY SOURCES

1 repository.ub.ac.id
Internet Source 7%

2 icast.isas.or.id
Internet Source 6%

3 www.researchgate.net
Internet Source 3%

4 repository.poliban.ac.id
Internet Source 3%

5 Submitted to University of Northumbria at
Newcastle
Student Paper 3%

6 www.hindawi.com
Internet Source 2%

7 coek.info
Internet Source 2%

8 I.M. Rasta, I.N. Suamir. "The role of vegetable
oil in water based phase change materials for
medium temperature refrigeration", Journal of
Energy Storage, 2018
Publication 2%

9	www.arnpjournals.org Internet Source	2%
10	Meizhi He, Luwei Yang, Wenye Lin, Jiayang Chen, Xiang Mao, Zhenjun Ma. "Preparation, thermal characterization and examination of phase change materials (PCMs) enhanced by carbon-based nanoparticles for solar thermal energy storage", Journal of Energy Storage, 2019 Publication	2%
11	A. A. N. B. Mulawarman, I. M. Rasta, Putu Wijaya Sunu. "Characterization and Experimental Investigation of Glycerol and Propylene glycol in Water Solutions for cool Thermal Energy Storage", 2018 International Conference on Applied Science and Technology (iCAST), 2018 Publication	2%
12	Submitted to University Tun Hussein Onn Malaysia Student Paper	1%
13	ipco-co.com Internet Source	1%
14	iopscience.iop.org Internet Source	1%
15	Rodrigo Canellas, Subba Digumarthy, Azadeh Tabari, Alexi Otrakji, Shaunagh McDermott,	1%

Efren J. Flores, Mannudeep Kalra. "Radiation dose reduction in chest dual-energy computed tomography: effect on image quality and diagnostic information", Radiologia Brasileira, 2018

Publication

16

www.scitepress.org

Internet Source

1 %

17

bura.brunel.ac.uk

Internet Source

1 %

18

iieta.org

Internet Source

1 %

19

ntnuopen.ntnu.no

Internet Source

1 %

20

spiral.imperial.ac.uk

Internet Source

1 %

21

worldwidescience.org

Internet Source

1 %

22

Pin Jin Ong, Yihao Leow, Xiang Yun Debbie Soo, Ming Hui Chua et al. "Valorization of Spent coffee Grounds: A sustainable resource for Bio-based phase change materials for thermal energy storage", Waste Management, 2023

Publication

<1 %

23 I. M. Rasta, I. N. G. Wardana, N. Hamidi, M. N. Sasongko. "The Role of Soya Oil Ester in Water-Based PCM for Low Temperature Cool Energy Storage", Journal of Thermodynamics, 2016
Publication <1 %

24 Submitted to University of Ulster
Student Paper <1 %

25 www.porkenvironment.org
Internet Source <1 %

26 Jeffrey I. Kindangen, Octavianus H. Rogi, Pierre H. Gosal, Veronica A. Kumurur. "Attic ventilation and radiant heat barriers in naturally ventilated galvanized metal-Roofed buildings", Advances in Building Energy Research, 2022
Publication <1 %

27 www.pumpheat.eu
Internet Source <1 %

28 Lisa Boussaba, Gilles Lefebvre. "Investigation of White Vaseline as an alternative Phase Change Material for Thermal Regulation of Physiological Birth Rooms", Journal of Building Engineering, 2021
Publication <1 %

29 Yingbo Chen, Shifeng Zhang, Qi Zhang, Yusheng Chen, Yufeng Zhang. "Composite <1 %

phase change materials prepared by
encapsulating paraffin in PVC macrocapsules",
Thermochimica Acta, 2014

Publication

30

daneshyari.com

Internet Source

<1 %

31

jit.ac.in

Internet Source

<1 %

32

oaktrust.library.tamu.edu

Internet Source

<1 %

33

scholar.ufs.ac.za

Internet Source

<1 %

34

theses.hal.science

Internet Source

<1 %

35

www.nrc.gov

Internet Source

<1 %

36

Alkan, C.. "Fatty acid/poly(methyl methacrylate) (PMMA) blends as form-stable phase change materials for latent heat thermal energy storage", Solar Energy, 200802

Publication

<1 %

37

Hadi Fauzi, Hendrik S.C. Metselaar, T.M.I. Mahlia, Mahyar Silakhori. "Thermo-physical stability of fatty acid eutectic mixtures subjected to accelerated aging for thermal

<1 %

energy storage (TES) application", Applied Thermal Engineering, 2014

Publication

38

Sharma, R. K., P. Ganesan, and V. V. Tyagi. "Long-term thermal and chemical reliability study of different organic phase change materials for thermal energy storage applications", Journal of Thermal Analysis and Calorimetry, 2016.

Publication

<1 %

39

I M Rasta, I N Suamir. "Study on Thermal Properties of Bio-PCM Candidates in Comparison with Propylene Glycol and Salt Based PCM for sub-Zero Energy Storage Applications", IOP Conference Series: Materials Science and Engineering, 2019

Publication

<1 %

40

Sun, Zhiming, Weian Kong, Shuilin Zheng, and Ray L. Frost. "Study on preparation and thermal energy storage properties of binary paraffin blends/opal shape-stabilized phase change materials", Solar Energy Materials and Solar Cells, 2013.

Publication

<1 %

